


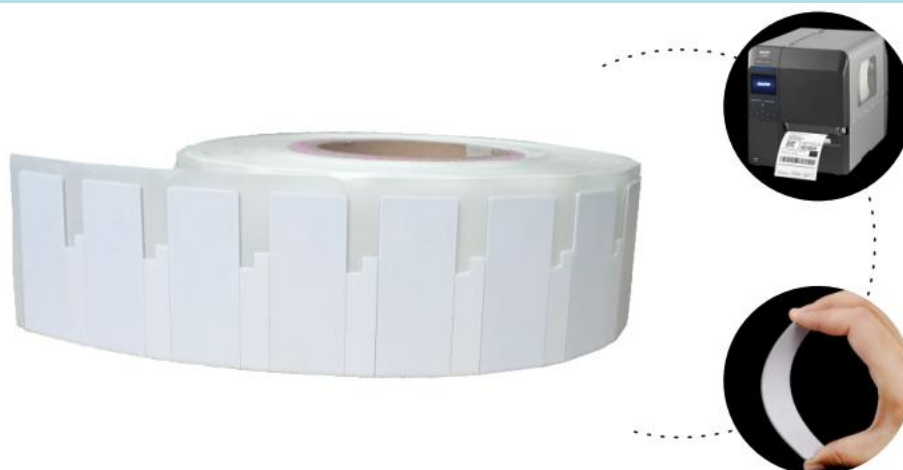

Flexible & Printable UHF On-metal Label

This on metal label is very thin, only 0.6mm and can be stuck on metallic asset easily, specially for curved and irregular surface, it has good performance on metal surface, can be printed and encoded by RFID printer at the same time.

Physical Features:

Model:	KLO7030
Material:	PET/Aluminum Foil/Foam
Dimensions:	70x30x0.6mm(LxWxT)
Working Temp:	-40~ +85℃
Survive Temp:	-40~+120℃
IP Rating:	IP68, test for 5 hours at 1m deep water


RFID Features:

RFID Standard:	EPC C1G2 (ISO18000-6C)
Chip Type:	Impinj Monza R6/R6-P/R6-A
EPC Memory:	96bits/128(96)bits/96bits
User Memory:	None/32(64) bits/None
Read Range(2W ERP FCC):	6m, On metal
	6.5m, On liquid
Read Range(2W ERP ETSI):	5.8m, On metal
	6m, On liquid


Other Features

Data Storage:	> 10 years
Re-write:	100,000 times
Installation:	Adhesive
Support Printer:	SATO CL4NX, Zebra ZT410 Silverline, Postek TX3r, etc.
Customization:	Logo, barcode/QR code, number printing, encoding, antenna design, etc.
Package:	Reel core inner dimension: 76.2mm/ 3" , 500pcs/roll.
Application:	Metallic container tracking Equipment&device tracking Warehouse shelf Automotive components tracking IT asset tracking, etc.


Dimensions:

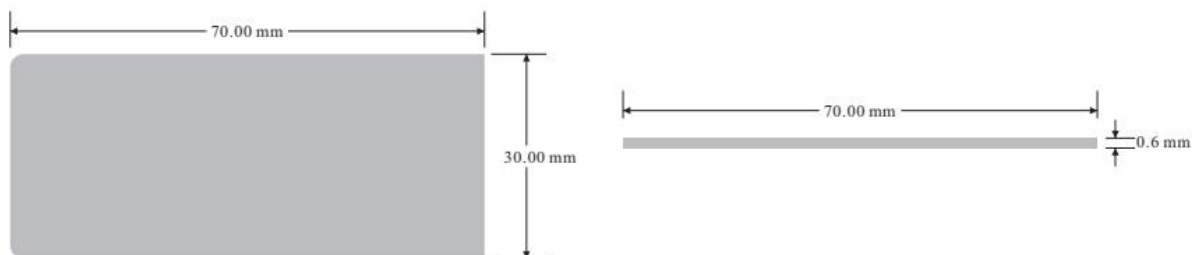


FCC on Metal/on liquid:

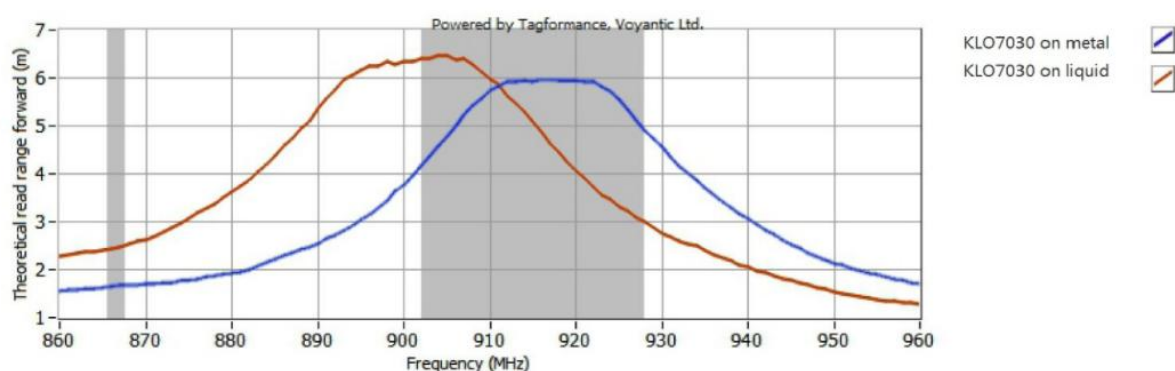

ETSL on Metal/on liquid:

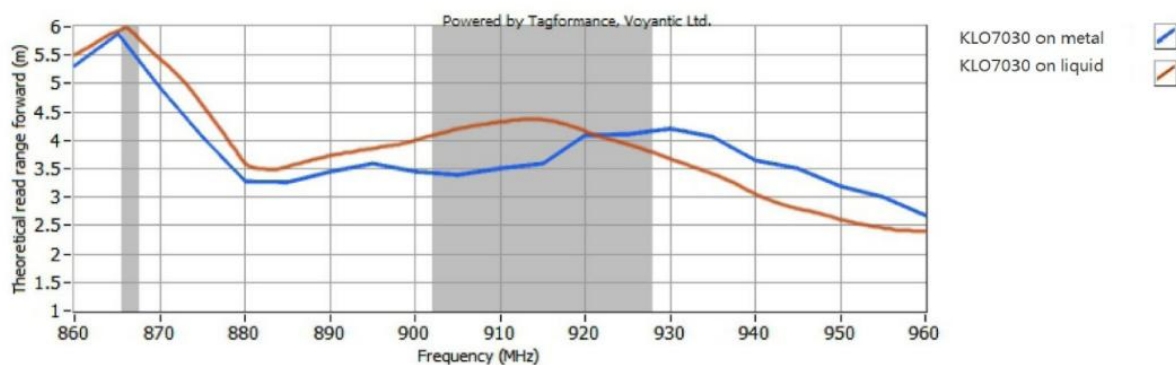

Application:

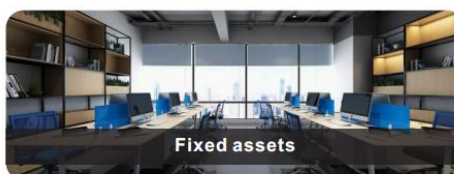

Kyrplink branch location:

Shenzhen | Shanghai | Beijing | Spain

For product and technology inquiries E-mail: info@kyrplink.com