


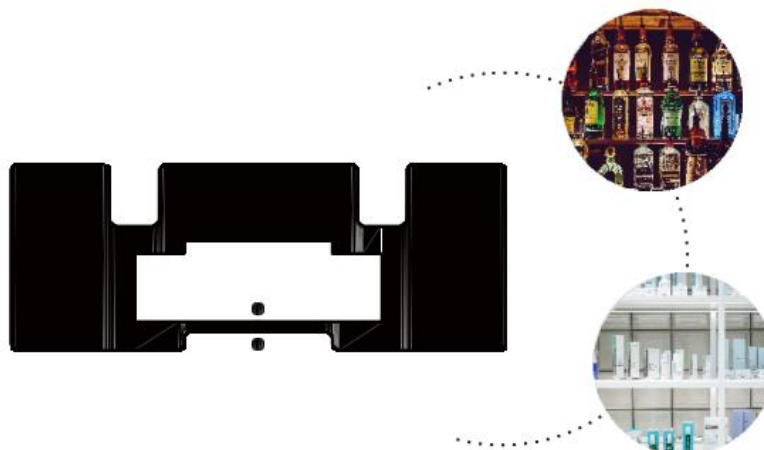

40x15mm Ucode 8 Anti Liquid Dry Inlay

This inlay is compatible with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860~ 960MHz. Each tag has a unique ID and stores user data. It is designed for liquid container management, cosmetic management, wine management, etc.

Physical Features:

Antenna Size:	40x15mm
Wet Inlay/Label Size:	43x18mm(customized)
Label Material :	PET
Working Temp:	-40~+85℃
Storage Temp:	-40~+85℃


RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	NXP Ucode 8
EPC Memory:	128 bit
TID Memory:	96 bit
Read Range(2W ERP):	3.7m,on liquid bottle


Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing,etc
Application:	• Liquid container management • Cosmetic management • Wine management • Pharmaceutical management, etc.

Dimensions:

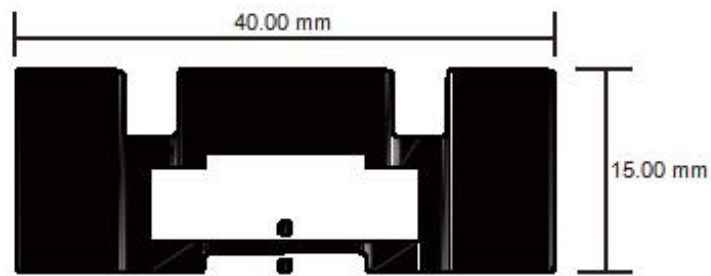

Read Range(2W ERP):

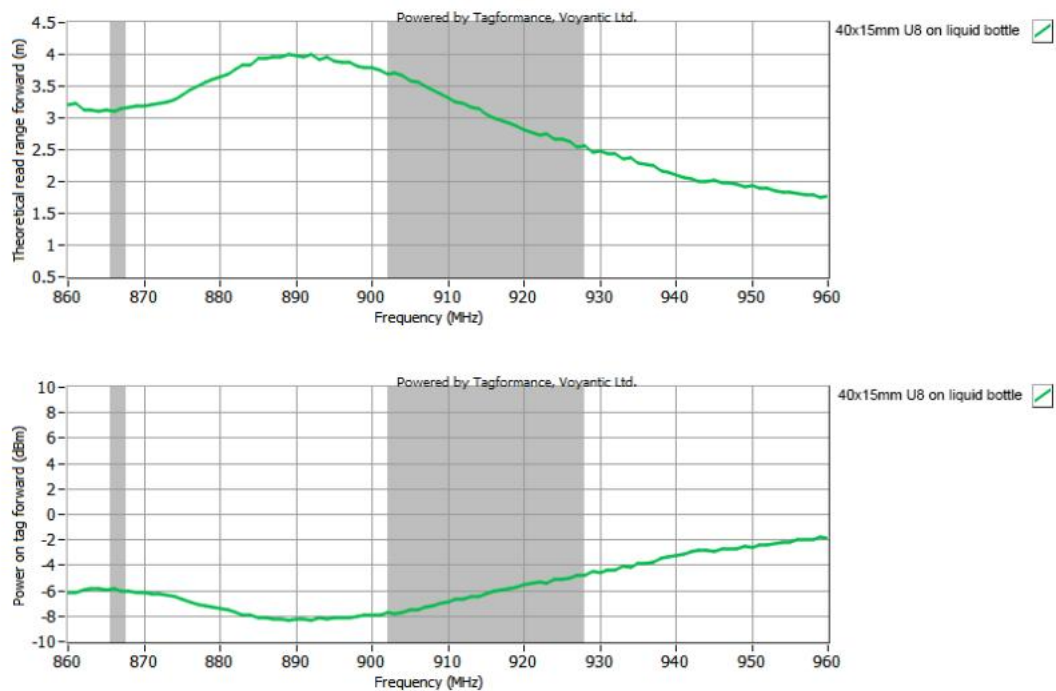

Application:



Kyrplink branch location:

Shenzhen | Shanghai | Beijing | Spain

For product and technology inquiries E-mail: info@kyrplink.com