



D=22mm Ntag RFID HF Dry Inlay

This inlay meets with ISO14443A standard, operating frequency is 13.56MHz. Each inlay has a unique ID and stores user data. It is applied to equipment tracking, IT assets management, library management, dangerous goods management, etc.

Physical Features:

Antenna Size:	D=22mm
Wet Inlay/Label Size:	D=25mm(customized)
Label Material:	Coated Paper/PET/Fragile Paper
Working Temp:	-40~+85℃
Storage Temp:	-40~+85℃


RFID Features:

RFID Standard:	ISO14443A
Chip Type:	NXP Ntag213/215/216
Memory:	144/504/888 bytes
Read Range:	0-100cm

Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Application:	• IT asset Tracking • Library management • Document tracking management • Dangerous goods management, etc

Dimensions:

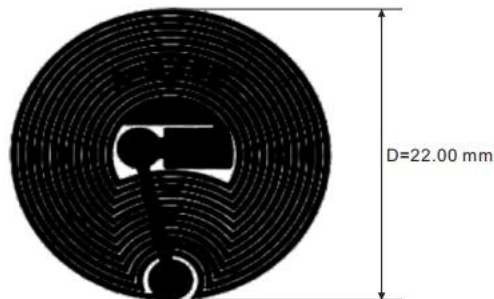

Application:



Kyrplink branch location:

Shenzhen | Shanghai | Beijing | Spain

For product and technology inquiries E-mail: info@kyrplink.com