


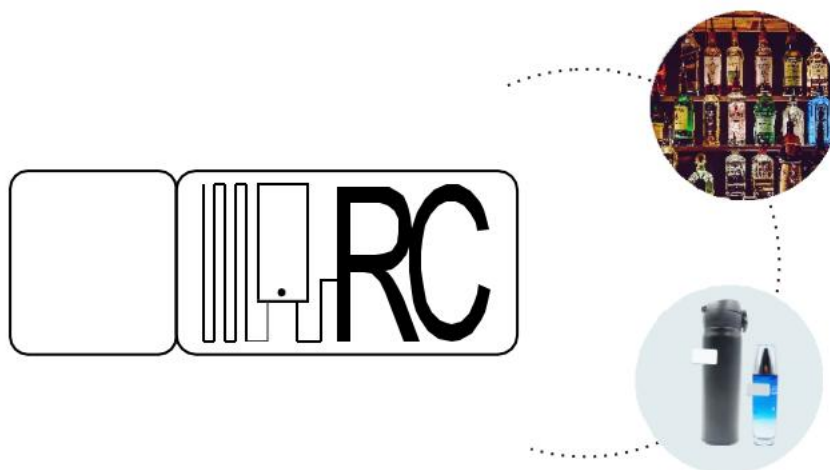

58.5x21mm Anti Liquid label

This inlay/label is compatible with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860~960MHz. Each tag has a unique TID. It can be used on metal and liquid-filled container via hang paste way, then very suitable to track and manage wine, cosmetic, perfume, blood bag, IT assets, electronic product, metal items, etc.

Physical Features:

Model:	KL5055
Label Size:	58.5x21mm(customized)
Label Material :	PET
Working Temp:	-40~+85°C
Survive Temp:	-40~+85°C


RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	NXP Ucode 8/9
EPC Memory:	128/96 bits
TID Memory:	96/96 bits
Read Range(2W ERP):	5m

Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Application:	• Liquid container management • Cosmetic management • Wine management • Pharmaceutical management, etc.

Dimensions:

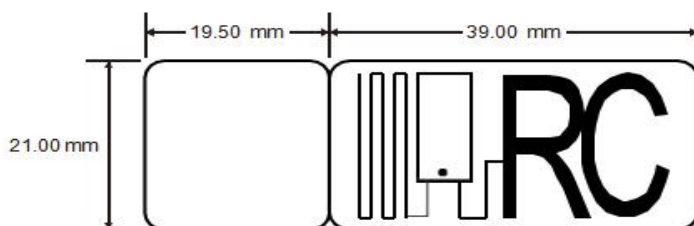

User's Guide:



Application:



Kyrplink branch location:

Shenzhen | Shanghai | Beijing | Spain

For product and technology inquiries E-mail: info@kyrplink.com