


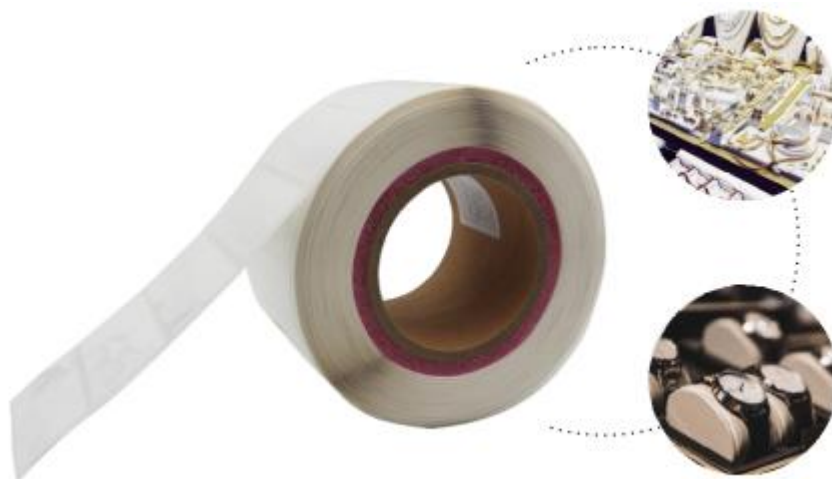

UHF PET Jewelry Label

This Jewelry adhesive label is complaint with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860~960MHz (It can be used worldwide). Each tag has a unique ID and stores user data. The Jewelry adhesive label is designed for use in jewelry and small items applications where the tag may be in close proximity to small metal or metallic coated objects. It can used for brand anti-counterfeiting, inventory counting, anti-theft tracking, etc

Physical Features:

Model:	KL9017-4
Material:	PET
Dimensions:	68x13mm
Working Temp:	-40~+85℃
Survive Temp:	-40~+85℃
IP Code:	IP68


RFID Features:

RFID Standard:	EPC C1G2 (ISO18000-6C)
Chip Type:	NXP Ucode 9
EPC Memory:	96bits
TID Memory:	96bits
Read Range(2W ERP FCC):	8m
Read Range(2W ERP ETSI):	3.5m


Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Installation:	Adhesive
Customization:	Logo, barcode/QR code, number printing, encoding, design, etc
Package:	Reel core inner dimension: 76.2mm/ 3", 2500pcs/roll.
Application:	• Jewelry Security management • Glasses Control Tracking • Bag Tracking management, etc.

Dimensions:

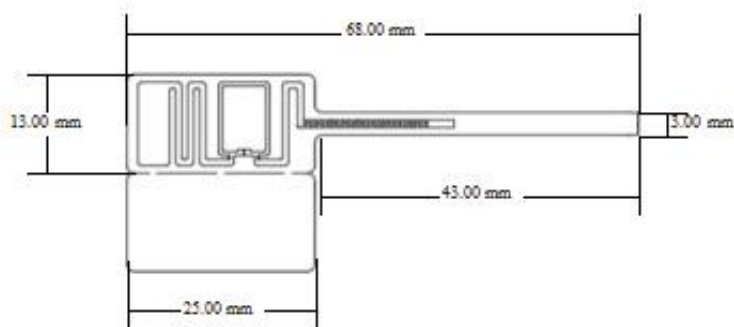

FCC on Metal/off Metal:

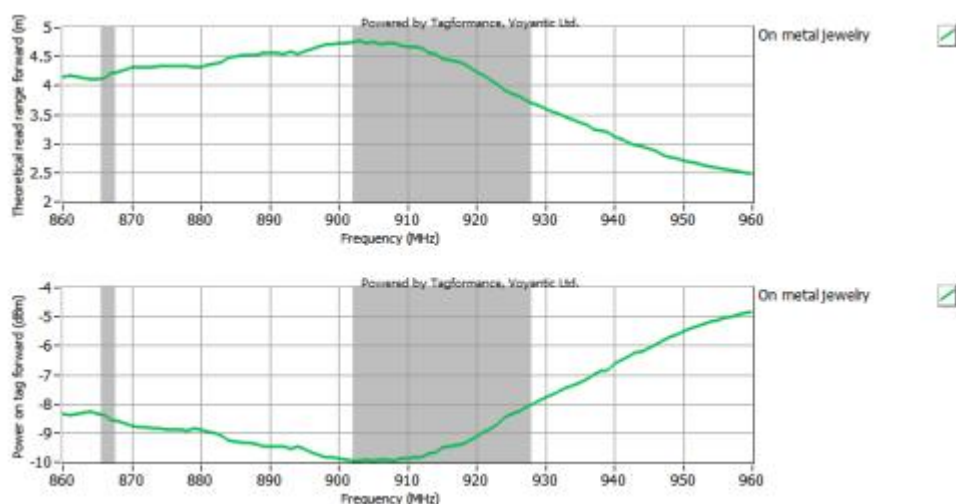

Application:

